

# AV-Jefe Products


## PL 12 Gooseneck Microphone

### Specifications:

Element	: Back Electret Condenser
Polar Pattern	: Cardioid
Frequency	: 80 Hz ~ 16,000Hz
Impedance	: $200 \Omega \pm 30\%$ ( at 1KHz )
Operating Volt	: 9~52V DC Phantom Power
Sensitivity	: $-63 \text{ dB} \pm 3 \text{ dB}$ ( 0 dB=1V/ $\mu\text{bar}$ 1KHz indicated by open circuit )
Dimension	: $\varnothing 13 \times 436 \text{ mm}$



### Pattern Graph (PL 12):

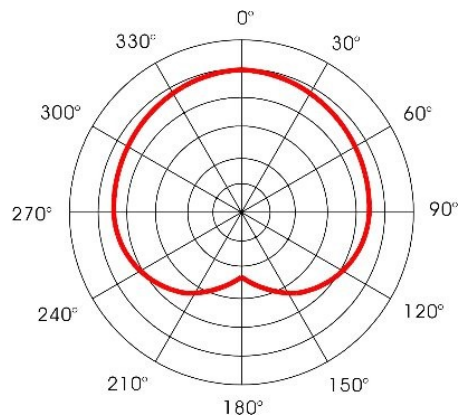

### Frequency Graph (PL 12):

